


Performances shown are for S.G. 1.0
60°F water, close-coupled configuration
with Cyclo seal. Other mounting styles or
S.G. may require curve adjustments.

Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
VARIOUS	12"	ENCLOSED	SINGLE	3"	2390	6"	6"	2

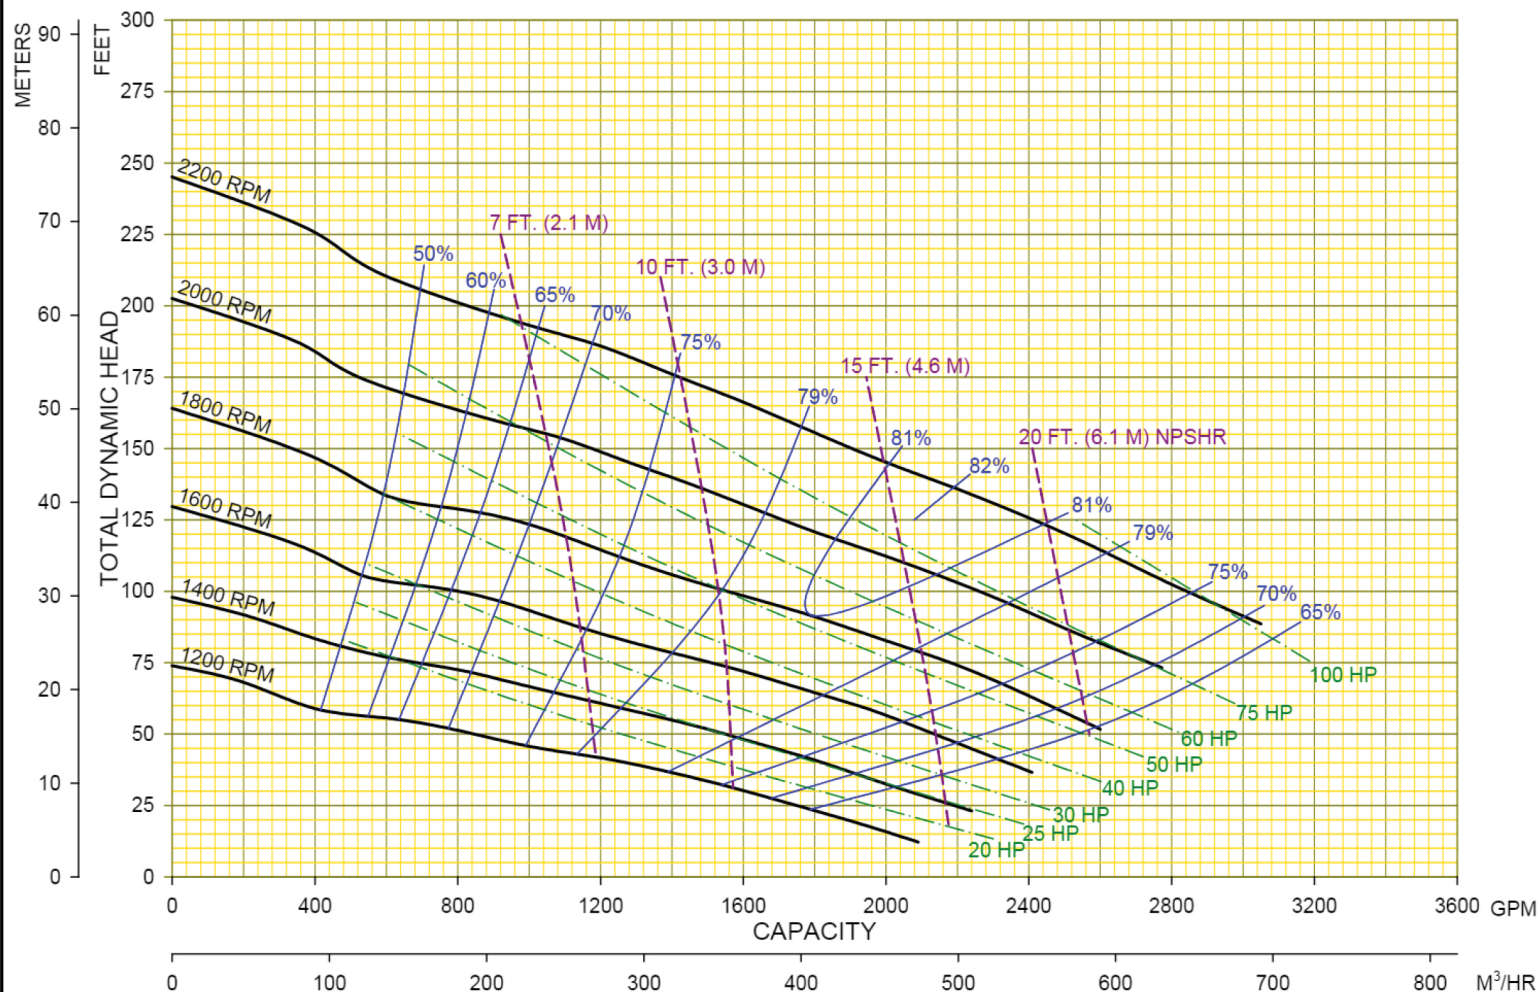

02	03/10/15	CTG	MODEL : 6612T	CURVE NO:
00	11/13/14	BE	TYPE : SOLIDS HANDLING	6612TVA