


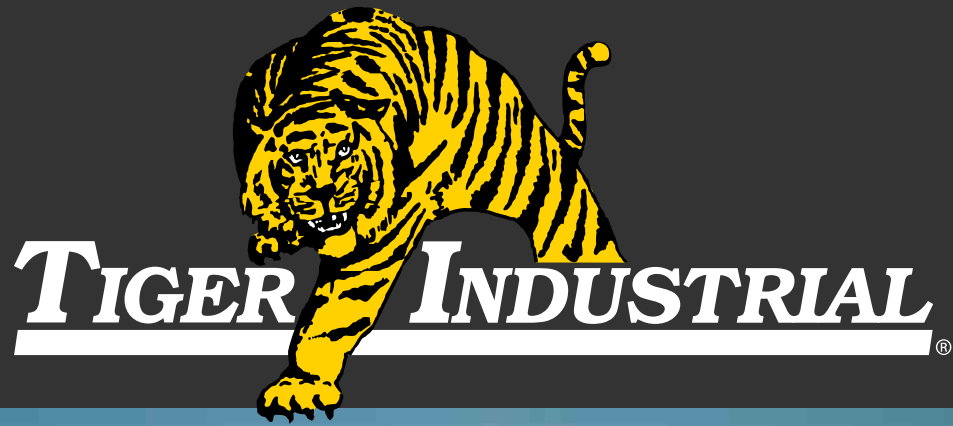

TANK FARM

Equipment Rental Solutions

JULY 2016

When it comes to supplying tank cleaning equipment, you need a company that gets the job done right.



That's the mark of Tiger.





TABLE OF CONTENTS



TANK FARMS	
HEATED MYERS PUMP	6
MYERS / JETTER PUMP	6
3,000 PSI DIESEL PRESSURE WASHER	6
4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER	7
4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER 2-SKIDS ON ONE TRAILER	7
SLUDGE MASTER 4" POPPET PUMP	8
10" X 8" VAC ASSIST PUMP - 600 HP	8
10" X 8" VAC ASSIST PUMP - 325 HP	8
6" X 6" WET PRIME PUMP	9
6" X 6" DIESEL VAC ASSIST (SUPER 6) PUMP	9
6" X 6" VAC ASSIST (SUPER 6) PUMP WITH NEDOX COATING	9
6" X 3" HIGH HEAD VAC ASSIST PUMP	9
6" VAC ASSIST PUMP	10
4" VAC ASSIST PUMP	10
4" TRASH PUMP	10
2" & 3" AIR DIAPHRAGM PUMP	10
12' / 24' ROAD CROSSING MANIFOLD	11
20"/24" COPPUS FAN AIR MOVER	11
AIR HORNS	11
CONTAINMENT BERM	11
8' X 16' ECOMATS	12
25 KVA PORTABLE GENERATOR	13
45 KVA PORTABLE GENERATOR	13
85 KVA PORTABLE GENERATOR	13
125 KVA PORTABLE GENERATOR	14
150 KVA PORTABLE GENERATOR	14
220 KVA PORTABLE GENERATOR	14
300 KVA PORTABLE GENERATOR	15
EXPLOSION PROOF LIGHTS	15
4,000 WATT PORTABLE LIGHT TOWER	15
HYDROBLASTERS (10K, 20K, 40K)	16
528 GALLON DOUBLE WALL FUEL TANK	17
AIR COMPRESSOR	17
MIX TANK PACKAGE/400 BBL MIX TANK	18
HOPPER TABLE, HOSE & 8" X 6" X 11" PUMP	19

Providing the most reliable rental equipment with a huge fleet of inventory for your tank farm needs.

That's the mark of Tiger. 



PRESSURE WASHERS



HEATED MYERS PUMP

SPECIFICATIONS

- Trailer Mount Dimensions - 19'L x 8'W x 7'H
- Weight - 8,250 LBS
- Fuel Capacity - 30 GAL
- Hose Length - 300' on the Reel
- Run Time - 4 HRS
- 500 GAL Water Tank
- 2 5/16 Trailer Ball
- Double Heater w/ temps to 170°F
- Pressures to 2,500 PSI
- 30 GPM
- Wash Heights to 35'

OPTIONAL ACCESSORIES

- Extended Length Gun
- Additional Tip Sizes
- Turbo Gun



MYERS / JETTER PUMP

SPECIFICATIONS

- Trailer Mount L x W x H - 18' x 8' x 9'
- Weight - 9,450 LBS
- Fuel Cap - 30 GAL
- Hose Length - 300' on Reel
- Water Inlet - 1" Crowfoot
- Water Outlet - 1"

OPTIONAL ACCESSORIES

- Pineapple Nozzle
- Tree Gun
- Shotgun



3,000 PSI DIESEL PRESSURE WASHER

SPECIFICATIONS

- 3,000 PSI
- Offshore Ready
- 4 GAL Per Minute
- Emergency Shut-off
- Drip Pan
- Easy Roll Wheels
- Galvanized Cage
- Spark Arrester Muffler
- Emergency Shut-off
- Chemical Suction Tube
- Dimensions: 47" L x 32" W x 35" H
- Shipping Weight: 375 LBS



PRESSURE WASHERS



4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER

SPECIFICATIONS

- 6 GPM
- Temperatures to 160°
- 25 HP Kubota Diesel
- Trailer Mount Dimensions - 19'L x 8'W x 6'H
- Skid Mount Dimensions 54"L x 48"W x 50"H
- Weight: 6,500 LBS
- Fuel Cap - 18 GAL
- Run Time - 4 HRS
- 325 GAL Water Tank
- 2" or 2 5/16" Trailer Ball

OPTIONAL ACCESSORIES

- Turbo Nozzle
- 3/8" X 50' Pressure Hose
- Foot Pedal
- Flex Lance
- Double Trigger Gun
- Ext. Wand
- 30" Hydro Mower



4,000 PSI TRAILER MOUNT HOT WATER PRESSURE WASHER 2-SKIDS ON ONE TRAILER (DOUBLE TROUBLE)

SPECIFICATIONS

- 6 GPM
- Temperatures to 160°
- 25 HP Kubota Diesel
- Trailer Mount Dimensions - 19'L x 8'W x 6'H
- Skid Mount Dimensions 54"L x 48"W x 50"H
- Weight - 8,000 LBS
- Fuel Cap - 36 GAL

- Run Time - 4 HRS
- 325 GAL Water Tank
- 2" or 2 5/16" Trailer Ball

OPTIONAL ACCESSORIES

- Turbo Nozzle
- 3/8" X 50' Pressure Hose
- Foot Pedal
- Flex Lance
- Double Trigger Gun
- Ext. Wand
- 30" Hydro Mower





SLUDGE MASTER 4" POPPET PUMP

SPECIFICATIONS

- Trailer Mount L x W x H - 21' x 8' x 7'
- Weight - 3,200 LBS
- Fuel Cap - 100 GAL
- Run Time - 4 HR
- GPM - 250
- Max Lift - 28'
- Max Head - 347'
- 2" Ball Hitch
- BBL/HR - 429
- Discharge - 4"
- Discharge Pressure - 150 PSI
- Max Solids - 3.5"

OPTIONAL ACCESSORIES

- 4" Suction Hose
- 4" Rubber Discharge
- 8" X 12' Road Crossing
- 12 X 12 Containment Berm



10" X 8" VAC ASSIST PUMP - 600 HP

SPECIFICATIONS

- 10 X 8 Pump with Redi-Prime Vacuum Assisted Priming
- Run-Dry Mechanical Seal Lube
- John Deere H485 600 HP Engine
- Integral Fuel Tank Capacity - 180 GAL
- Maximum Flow - 7,250/GPM
- 445' Total Dynamic Head



10" X 8" VAC ASSIST PUMP - 325 HP

SPECIFICATIONS

- 10 X 8 Pump with Redi-Prime Vacuum Assisted Priming
- Run-Dry Mechanical Seal Lube
- John Deere 6,090 325 HP Engine
- Integral Fuel Tank Capacity - 190 GAL
- Maximum Flow - 4,900/GPM
- 350' Total Dynamic Head



6" X 6" WET PRIME PUMP

SPECIFICATIONS

- Weight - 2,450 LBS
- Horsepower - 74 HP
- Fuel Capacity - 40 GAL
- Run Time - 22 HRS
- Max Flow - 1,680 GPM
- Max Head - 170'
- Solids Diameter - 3"
- Trash Clean-out Port



6" X 6" DIESEL VAC ASSIST (SUPER 6) PUMP

SPECIFICATIONS

- 14.00" Impeller
- Weight - 3,290 LBS
- Horsepower - 174 HP
- Fuel Cap - 148 GAL
- Run Time - 56 HR
- Max Flow - 2,800 GPM
- Max Head - 295'
- Solids Diameter - 3"
- Dry Prime up to 28' with Automatic Re-Priming



WITH NEDOX COATING

- Operating Temps from -250°F (-157°C) to 550°F (288°C)
- Chemical, Acid and Alkaline Resistance
- Self-lubricating, Non-porous, Non-wetting Surface Characteristics
- Compliance with Industry Standards Including: ASTM B656 and ASTM B733, USDA and FDA, REACH Compliant, Meets and Exceeds Mil-C-26074 Class 1 - 4 and AMS 2404 and 2405

6" X 3" HIGH HEAD VAC ASSIST PUMP

SPECIFICATIONS

- 15.22" Impeller
- Horsepower - 174 HP
- Fuel Capacity - 190 GAL
- Max Flow - 1,070 GPM
- Max Head - 480'
- Dry Prime up to 28' with Automatic Re-Priming





6" VAC ASSIST PUMP

SPECIFICATIONS

- 11.00" Trimmed Impeller
- Horsepower – 74HP
- Fuel Capacity – 90 GAL
- Max Flow – 3,400 GPM
- Max Head – 200'
- Dry Prime up to 28' with Automatic Re-Prime



4" VAC ASSIST PUMP

SPECIFICATIONS

- L x W x H - 12" x 16' 4" x 7' 7"
- Weight - 3,200 LBS
- Fuel Capacity - 40 GAL
- GPM - 1,350
- 76 HP
- Max Head -130'
- 2 5/16" Ball Hitch
- F1914 Deutz Engine



4" TRASH PUMP

SPECIFICATIONS

- 4" DPT Heavy Duty Series Trash Pump
- GPM - 750
- Max Head -120'
- Self-Priming / 3" Solids Handling
- 76HP Duetz Diesel Engine F4L914 Air Cooled
- Heavy Duty Skid / Trailer with Removable Axle and Tongue
- 2 5/16 Ball Hitch with Adjustable Channel
- 95 GAL Integrated Fuel Cell



2" & 3" AIR DIAPHRAGM PUMP

SPECIFICATIONS

- L x W x H - 20" x 11" x 33"
- Weight - 115 LBS
- Air Inlet - 3/4 Crowfoot
- GPM - 260
- Max Particle Size - .375
- Suction Lift - 20'

OPTIONAL ACCESSORIES

- 3" Suction Hose
- 3" Rubber Discharge
- 8" x 12' Road Crossing
- 12' x 12' Containment Berm



12' / 24' ROAD CROSSING MANIFOLD

SPECIFICATIONS

12' MANIFOLD

- Length - 12'
- Width - 48"
- Height - 6"
- Inlet / Outlet 12" or 8" 150 Flange
- 80 PSI Max Pressure

24' MANIFOLD

- Length - 24'
- Width - 48"
- Height - 6"
- Inlet / Outlet 12" or 8" 150 Flange
- 80 PSI Max Pressure



20"/24" COPPUS FAN AIR MOVER

SPECIFICATIONS

- Width - 20" / 24"
- Height - 10"
- Weight - 50 LBS
- Air Inlet - 3/4 Crow foot
- CFM - 1100



OPTIONAL ACCESSORIES

- 3/4 RED Air Hose
- 20" x 25' Duct Hose

AIR HORN

SPECIFICATIONS

- Metal Horn - 6"
- Overall Length - 44.25"
- Diameter of Base - 11.25"
- NPT Size - 1"
- Bolt Circle Diameter - 10.5"
- Base Slot Diameter - 0.4"
- Net Weight - 22.3 lbs



CONTAINMENT BERM

SPECIFICATIONS

- L x W x H - 6' x 6' x 12"
- L x W x H - 12' x 12' x 12"
- L x W x H - 25' x 12' x 12"
- L x W x H - 50' x 12' x 12"

OPTIONAL ACCESSORIES

- Pressure Washer
- Felt Pad
- Duck Bill Vac Attachment





ECOMATS™

TIGER 8' X 16' ECOMATS™

SPECIFICATIONS

- Weight - 2,950 LBS +/- 2%
- 128 SQ FT Coverage
- 3 Ply - 8' x 16'
- .05% Absorption Rate
- Load Bearing Weight - in Excess of 1,000 PSI
- Galvanized 3 Channel Runners
- ASME B30 Lifting Standards
- ASTM E84 Class 2 (B) Flame Spread Index Rated
- Synthetic Material Designed with UV Inhibitors
- Anti-Static Inhibitors
- Engineered Work Surface for Safety
- Mats are 100% Recyclable


Safer

- Fire rated
- No broken boards
- No gaps in boards
- Safer lifting design
- Static inhibited
- No cable loops or chains



More Durable

- Synthetic material
- 3-ply laminated
- Bolted, not nailed



Better for Environment

- .05% absorption rate
- Easily cleaned
- Less solids buildup



GENERATOR ACCESSORIES

OPTIONAL ACCESSORIES

- 12 X 12 Containment Berm • 50' Ext. Cord • Aux. Fuel Tank • Dist. Box 100 Amp.

25 KVA PORTABLE GENERATOR

SPECIFICATIONS

- L x W x H - 10' X 5' X 5'
- Standby Output - 22 KW
- Prime Output - 20 KW
- Weight - 2,200 LBS
- Fuel Cap - 42 GAL
- Run Time - 30 HRS

AMP DRAW

- 1PH 120V - 55 AMPS
- 1PH 240V - 27 AMPS
- 3PH 240V - 60 AMPS
- 3PH 480V - 30 AMPS

FUEL CONSUMPTION

- Full Load 1.65 GPH
- 3/4 Load 1.3 GPH
- 1/2 Load 0.9 GPH



45 KVA PORTABLE GENERATOR

SPECIFICATIONS

- L x W x H - 12' x 6' x 8'
- Standby Output - 37 KW
- Prime Output - 36 KW
- Weight - 2,940 LBS
- Fuel Cap - 30 GAL
- Run Time - 22 HRS

AMP DRAW

- 1PH 120V - 100 AMPS
- 1PH 240V - 50 AMPS
- 3PH 240V - 108 AMPS
- 3PH 480V - 54 AMPS

FUEL CONSUMPTION

- Full Load 3.1 GPH
- 3/4 Load 2.2 GPH
- 1/2 Load 1.6 GPH



85 KVA PORTABLE GENERATOR

SPECIFICATIONS

- L x W x H - 2' X 6' X 8'
- Standby Output - 70 KW
- Prime Output - 66 KW
- Weight - 5,000 LBS
- Fuel Cap - 127 GAL
- Run Time - 22 HRS

AMP DRAW

- 1PH 120V - 188 AMPS
- 1PH 240V - 95 AMPS
- 3PH 240V - 204 AMPS
- 3PH 480V - 102 AMPS

FUEL CONSUMPTION

- Full Load 5.5 GPH
- 3/4 Load 3.8 GPH
- 1/2 Load 2.6 GPH



GENERATORS



125 KVA PORTABLE GENERATOR

SPECIFICATIONS

- L x W x H - 12' X 6' X 8'
- Standby Output - 110 KW
- Prime Output - 100 KW
- Weight - 6,900 LBS
- Fuel Cap - 169 GAL

AMP DRAW

- 1PH 120V - 277 AMPS
- 1PH 240V - 139 AMPS
- 3PH 240V - 300 AMPS
- 3PH 480V - 150 AMPS

FUEL CONSUMPTION

- Full Load 7.3 GPH
- 3/4 Load 5.7 GPH
- 1/2 Load 4.0 GPH



150 KVA PORTABLE GENERATOR

SPECIFICATIONS

- L x W x H - 12' x 6' x 8'
- Standby Output - 132 KW
- Prime Output - 120 KW
- Weight - 9,278 LBS
- Fuel Cap - 214 GAL
- Run Time - 25 HRS

AMP DRAW

- 1PH 120V - 333 AMPS
- 1PH 240V - 166 AMPS
- 3PH 240V - 361 AMPS
- 3PH 480V - 180 AMPS

FUEL CONSUMPTION

- Full Load 8.4 GPH
- 3/4 Load 6.5 GPH
- 1/2 Load 4.9 GPH



220 KVA PORTABLE GENERATOR

SPECIFICATIONS

- Trailer Mount L x W x H - 16' x 6' x 8'
- Standby Output - 194 KW
- Prime Output - 176 KW
- Weight: 6,900 LBS
- Fuel Cap: 214 GAL
- Run Time: 21 HRS

AMP DRAW

- 1PH 120V - 488 AMPS
- 1PH 240V - 244 AMPS
- 3PH 240V - 529 AMPS
- 3PH 480V - 264 AMPS

FUEL CONSUMPTION

- Full Load 13.6 GPH
- 3/4 Load 10.4 GPH
- 1/2 Load 7.7 GPH



GENERATORS & LIGHTS



300 KVA PORTABLE GENERATOR

SPECIFICATIONS

- Trailer Mount L x W x H - 16' X 6' X 11'
- Standby Output - 264 KW
- Prime Output - 240 KW
- Weight - 13,000 LBS
- Fuel Cap - 300 GAL
- Run Time - 21 HRS

AMP DRAW

- 1PH 120V - 667 AMPS
- 1PH 240V - 333 AMPS
- 3PH 240V - 722 AMPS
- 3PH 480V - 361 AMPS

FUEL CONSUMPTION

- Full Load 15 GPH
- 3/4 Load 14 GPH
- 1/2 Load 11 GPH



EXPLOSION PROOF LED TANK LIGHTS

SPECIFICATIONS

- 200' of Cord
- Voltage - Universal Inputs
- 100-277V AC, 50/60 HZ
- 347-480V AC, 50/60 HZ
- Housing - Aluminum



4,000 WATT PORTABLE LIGHT TOWER

ELECTRIC OR MANUAL WINCH

SPECIFICATIONS

- Trailer Mount:
 - Length - 173"
 - Width - 50"
 - Height - 70"
- Max Height - 32'
- Weight - 1,644 LBS
- Fuel Cap. 30 GAL
- Run Time - 48 HR
- Lumen - 440,000
- 2" Ball Hitch
- Light Coverage 5-7 Acres
- Sound Level 66 DB



HYDROBLASTERS



10,000 PSI @ 52 GPM HYDROBLASTER

SPECIFICATIONS

- Weight - 9,450 LBS
- Fuel Cap - 250 GAL
- Run Time - 22 HRS
- Water Inlet - 1" Crow Foot
- Water Outlet - 13 MM MP

OPTIONAL ACCESSORIES

TURBO NOZZLE

- 1/2" X 50' Blast Hose
- Foot Pedal
- Double Trigger Gun
- 3D Nozzle

20,000 PSI @ 24 GPM HYDROBLASTER

SPECIFICATIONS

- Weight - 9,450 LBS
- Fuel Cap - 250 GAL
- Run Time - 22 HRS
- Water Inlet - 1" Crow Foot
- Water Outlet - 13 MM MP

OPTIONAL ACCESSORIES

TURBO NOZZLE

- 13 MM x 50' Blast Hose
- Foot Pedal
- Double Trigger Gun
- 3D Nozzle

40,000 PSI @ 11 GPM HYDROBLASTER

SPECIFICATIONS

- Weight - 9,450 LBS
- Fuel Cap - 250 GAL
- Run Time - 22 HRS
- Water Inlet - 1" Crow Foot
- Water Outlet - 8 MM MP

OPTIONAL ACCESSORIES

TURBO NOZZLE

- 5 MM (or 8 MM) x 50' Blast Hose
- Foot Pedal
- Double Trigger Gun



FUEL TANKS & AIR COMPRESSORS



528 GALLON DOUBLE WALL FUEL TANK

SPECIFICATIONS

- 87" x 46" x 52"
- 110% Secondary Containment
- Internal Baffles
- 1,825 LBS Empty/5,574 LBS Full
- Secure Hose Access
- Full Load Lifting Eyes
- Tie Down Points
- Direct to Machinery Fuel Ports

OPTIONAL ACCESSORIES

- 16' Tandem Trailer
- 110V Fuel Pump
- Fuel Pump - 12V Fuel Pump & Solar Panel



AIR COMPRESSOR

SPECIFICATIONS

- 210 CFM Compressor
- 100 PSI
- 45 HP Diesel
- 28 GAL Fuel Tank






400 BBL MIX TANK

SPECIFICATIONS

- Skid mounted
- Round bottom
- Dimensions:
 - Width: 102"
 - Length: 506"
 - Height: 135"
- 2 compartment (200 BBL each) with internal valves to Connect and over flow

- (2) Class 1 Div 1 10 HP electric mixers
- (3) Class 1 Div 1 120V LED lights
- 4" Gun Line with Nozzles For Rolling Tank
- Internal Level Indicators
- Removable Tarp Canopy
- Internal Liner
- Weight: 36,000 LBS
- Weight with Canopy:37,500 lbs
- 4 point lifting

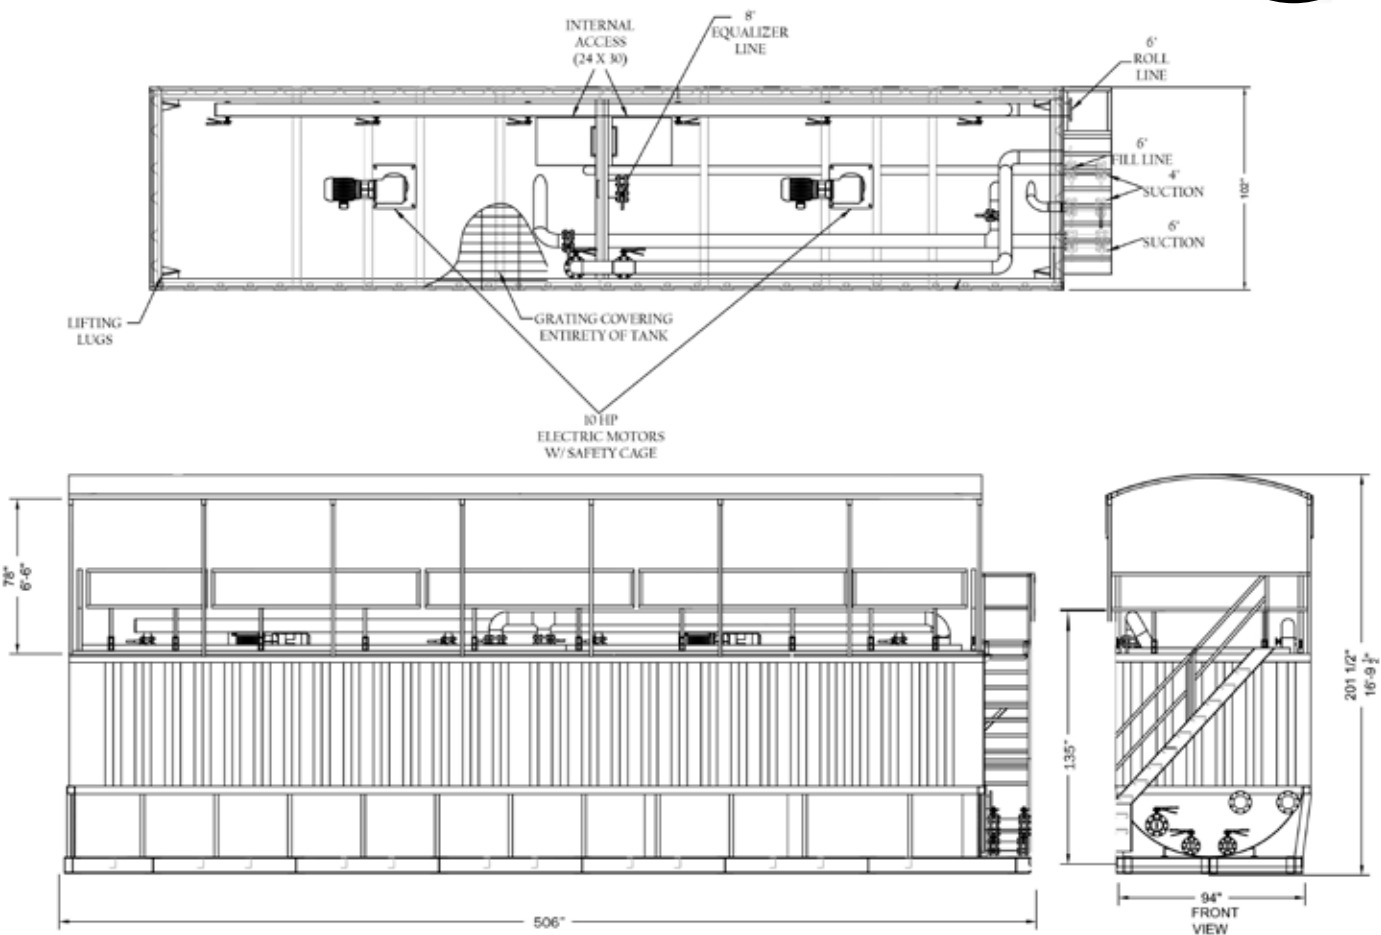

8" X 6" X 11" 250 PUMP

SPECIFICATIONS

- Class I Div I - 75 HP Electric Motor
- 75 HP Motor Starter - Explosion Proof
- 48"x120"x73"
- 4,000 LBS.



HOPPER TABLE

SPECIFICATIONS

- 6x5x11 250 pump
- Shearing Impeller
- 100 HP Class I Div II Motor
- 100 HP starter expl proof
- 16' galvanized skid
- 4" hopper



TANK TRUCK HOSES

SPECIFICATIONS

- 2" - 12"



TIGER INDUSTRIAL LOCATIONS



Beaumont, Texas

1313 GULF STREET • BEAUMONT, TX 77701
TEL: 1-409-832-9336

Dilley, Texas

13400 S. INTERSTATE 35 • DILLEY, TX 78017

LaPorte, Texas

12803 HIGHWAY 225 • LA PORTE, TX 77571

Midland, Texas

7701 WEST INDUSTRIAL • MIDLAND, TX 79706

Victoria, Texas

11901 US HIGHWAY 59 • N. VICTORIA, TX 77905

Broussard, Louisiana

1125 PETROLEUM PKWY. • BROUSSARD, LA 70518

Sulphur, Louisiana

3334 CARBIDE DR • SULPHUR LA 70665

Springer, Oklahoma

10834 STATE HIGHWAY 53 • SPRINGER, OK 73458



1-888-866-0047

www.tigerindustrialrentals.com